SIGNATONE
PROBING DIVISION
LUCAS/SIGNATONE CORPORATION

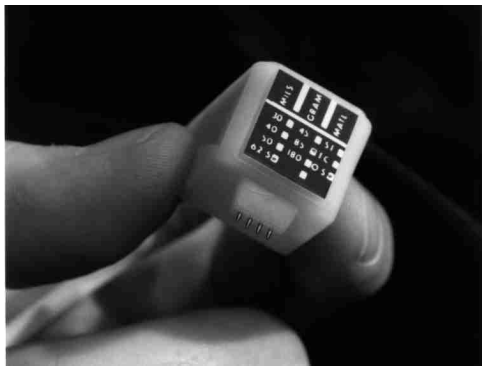

Lucas/Signatone Four Point Probe
New Part Numbers

Effective April 1st , 2002

SP4- ☐☐☐☐☐☐☐☐

S = Standard, flying lead termination
Y = 15" wire, 9 pin D sub, for SYS-301
Q = 6" wire, 9 pin D sub, for QuadPro

R = 1.6 mil radius tip
F = 5 mil radius tip
B = 10 mil radius tip

T = Tungsten Carbide
O = Osmium

045 = 45 gram spring pressure
085 = 85 gram spring pressure
180 = 180 gram spring pressure

40 = 40 mil spacing between tips
50 = 50 mil spacing between tips
62 = 62.5 mil spacing between tips

HT4 - ☐☐ **1 8 0** . ☐☐☐

S = Standard, flying lead termination
Y = 15" wire, 9 pin D sub termination
Q = 6" wire, 9 pin D sub termination

R = 1.6 mil radius tip
F = 5 mil radius tip
B = 10 mil radius tip

T = Tungsten Carbide
O = Osmium

180 = 180 gram spring pressure

50 = 50 mil spacing between tips
62 = 62.5 mil spacing between tips

Contact us for HT4…pricing.