



SIGNATONE TRX PROBE HOLDER

Very low-Noise probe holder ($\approx \pm 2 \text{ fA}$) when used with the triaxial chuck and in an electrically shielded environment. Designed for use with all Signatone Micropositioners and a variety of probe tips

The Signatone Triaxial Shielded probe tip holder includes a 60" Triax cable terminating in a Triax connector. Includes Screw-Lock probe tip mounting mechanism

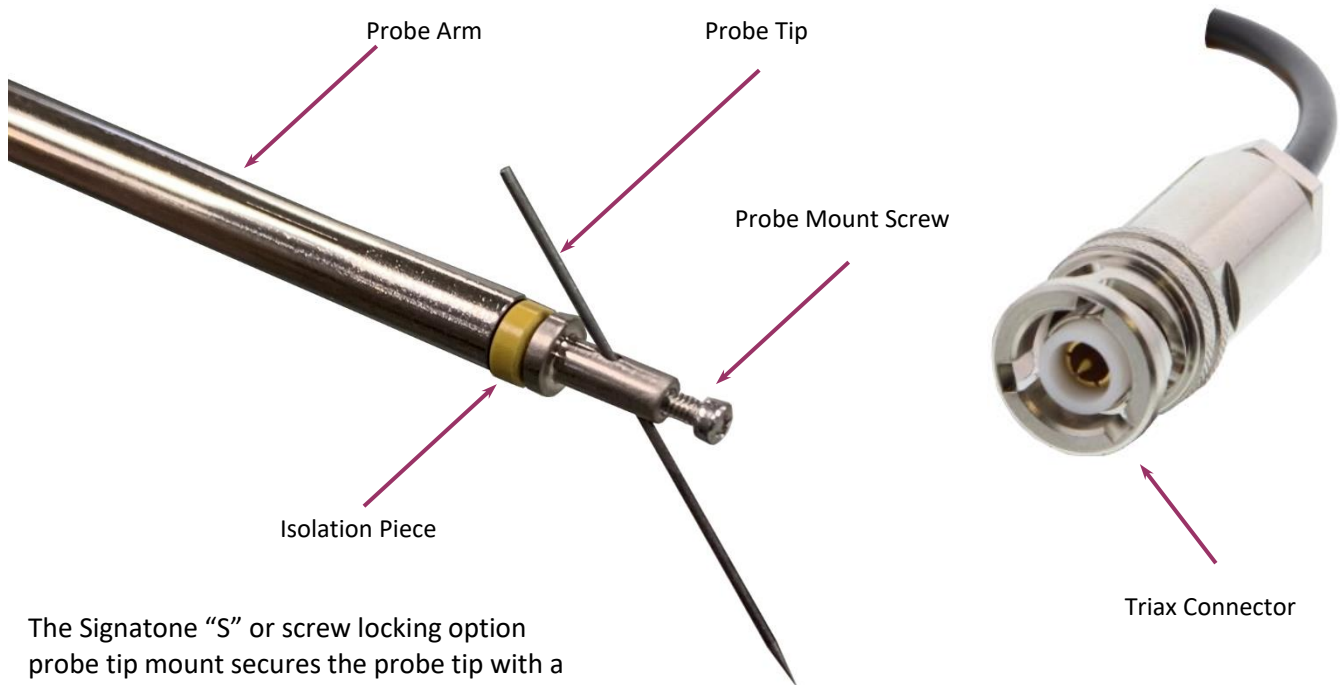

The Signatone "S" or screw locking option probe tip mount secures the probe tip with a set screw – allows for easy and quick probe replacement

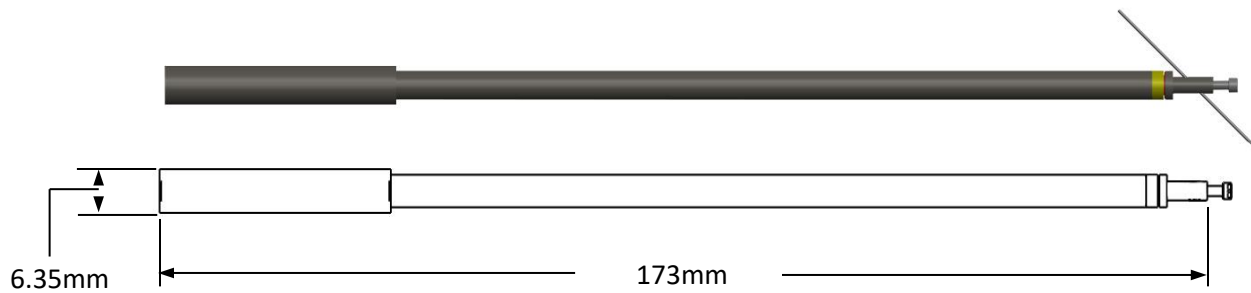

Ultra-Low Current and Full Range Thermal Probing

PART #	Material	Length	Probe Mount	Connection	Typical Use
TRX-L-S-60-#	Brass	173mm	Screw- Lock	Triax	$\pm 2\text{fA}$

❖ WARRANTY

- Standard Warranty 12 months *
- For Extended Warranty and Service Contracts : Contact Signatone Corp. for more information

* See *Signatone Corporate Terms and Conditions of Sale* for further details.

- **North America:** Sales.NA@signatone.com
- **Europe:** Sales.Europe@signatone.com
- **Asia:** Sales.Asia@signatone.com

